

## A2035-H

### Positioning Product

Fleet management  
Asset Tracking  
Vehicle Tracking  
Personal Tracking  
Portable Device

Integrated Antenna  
Low Power Consumption  
MEMS support



## Performance SiRFstarIV Integrated Solution The GPS Antenna Module Sub-System

The A2035-H is Maestro Wireless Solutions answer to the most critical challenges in the GPS market: simplified integration, leading performance, and efficient time to market. The combination of the enhanced fully functional SiRFStar IV GPS engine and a custom-designed high directional patch antenna on board help to ease engineers integration effort of leading GPS technology into devices. The A2035-H fully addresses the demand for extreme low power operation and ultra-fast Time-To-First-Fix. Its high level of sensitivity allows for use in the most demanding environmental conditions.

### Features


- SMT based integrated GPS antenna module
- 16.5 x 30.5 mm<sup>2</sup>
- 29 mA average tracking (full power mode)
- 163 dBm tracking
- up to 8 strongest interferes signals detected and mitigated

### Benefits

- Lowest assembly cost
- Small footprint
- Ultra Low power consumption
- Bench marking sensitivity
- In-band jamming signal removal

# Positioning Receiver Portfolio

With the mission to support our customers in implementing GPS functionality into their systems, Maestro Wireless Solutions is offering a distinct product portfolio to address a wide area of applications. These range from traditional telematics solutions to latest highly integrated consumer devices, all of them having their special requirements towards a GPS module. Based on SiRFstarIII and now also SiRFstarIV chip sets, Maestro Wireless Solutions GPS module solutions address different specific needs and combine high performance, low power consumption, and simplified integration effort. Our modules comply with the RoHS standard and are 100% electrically and functionally tested prior to packaging, thereby assuring the guarantee of the highest quality products.

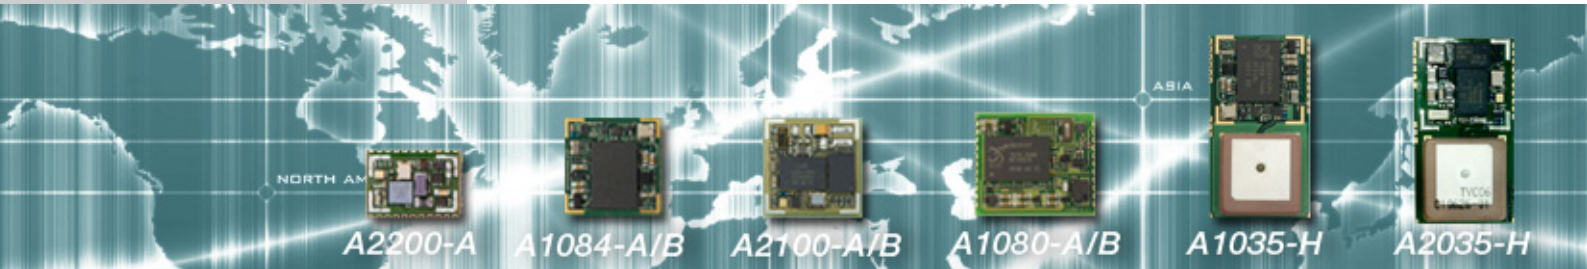

Ordering information:  
A2035-H410  
EVA2035-H Evaluation Board

## Technical Details A2035-H

### PERFORMANCE

<b>Channels</b>	48 parallel tracking
<b>Correlators</b>	400,000 plus
<b>Frequency</b>	L1 - 1,575 MHz
<b>Sensitivity</b>	
Tracking	- 163 dBm
Navigation	- 160 dBm
Acquisition (cold start)	- 148 dBm
<b>Position Accuracy (horizontal)</b>	< 2.5 m CEP (autonomous) < 2.0 m CEP SBAS
<b>Time To First Fix</b>	
Hot Start <sup>1)</sup>	< 1 s
Warm Start <sup>2)</sup>	< 32 s
Cold Start <sup>3)</sup>	< 35 s
<b>Navigation</b>	
Update Rate	1 Hz / 5 Hz Supported

### COMMUNICATION

<b>UART - NMEA (Default)</b>	
NMEA message Switchable	GGA, RMC, GSA, GSV, VTG, GLL, ZDA
Baud rate Switchable	4,800 (default) 1,200 to 115.2k
Ports	Tx (NMEA output) Rx (NMEA input)
<b>UART - SiRF Specific SSB/OSP</b>	
SiRFbinary protocol	Protocol for SiRFstar product family up to SSIII
One Socket Protocol	Protocol extension for SiRFstarIV
Baud rate Switchable	57.6k (default) 1,200 to 115.2k
Ports	Tx (Binary output) Rx (Binary input)
<b>SPI - NMEA/SiRF Specific</b>	
Clock	Up to 6.8 MHz
Ports	DO (NMEA / Binary output) DI (NMEA / Binary input) SPI CLK (clock - input) SPI CS (chip select - input)

### HIGHLIGHTS

<b>SiRFnav™</b>	High availability and coverage; improved TTFF in weak signal environments
<b>SiRFaware™</b>	Keeps module in a state of readiness for rapid navigation (hot start)
<b>Jammer remover technology</b>	Detects and removes up to 8 in-band jammers with minimal loss of sensitivity
<b>A-GPS</b>	Embedded Extended Ephemeris (SiRFInstantFix1) and Ephemeris Push support
<b>MEMS I2C interface</b>	Prepared to use additional sensor information for improved navigation
<b>Flash-based design</b>	Prepared to store configuration and calibration data and to allow firmware updates
<b>Internal antenna</b>	Best matched build-in antenna for easy integration

### ENVIRONMENT


<b>Temperature</b>	
Operating	-40°C to +85°C
Storage	-40°C to +85°C
<b>Humidity</b>	
	Non condensing

### POWER

<b>Input voltage</b>	3.0 to 3.6 VDC Nominal 3.3 VDC
<b>Average current draw</b>	
Full power mode (searching)	40 mA (TBC)
Full power mode (tracking)	29 mA (TBC)
PTF mode	4.1 mA (TBC)
MPM / SiRFaware	40 µA (TBC)
Hibernate	23.5 µA (TBC)
<b>Antenna supply via Vant</b>	
Voltage range	up to 5.0V
Max. allowed current <sup>4)</sup>	50 mA

### MECHANICAL

<b>Dimensions</b>	
L x W x H	30.5 x 16.5 x 5.0 mm <sup>3</sup>
L x W x H	1.2" x 0.65" x 0.2"
<b>Weight</b>	4.0 g / 0.14 oz.

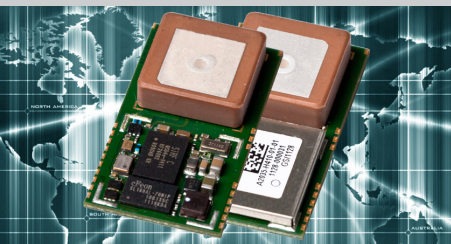

Maestro Wireless Solutions Ltd  
3603-9, 36/F  
118 Connaught Road West  
Hong Kong  
Tel: (852) 2869 0688  
Fax: (852) 2525 4701  
contact@maestro-wireless.com  
www.maestro-wireless.com

1) The receiver has estimates of time/date/position and valid almanac and ephemeris data.  
2) The receiver has estimates of time/date/position and almanac.  
3) The receiver has no estimate of time/date/position, and no recent almanac.  
4) An external current limiter is suggested to avoid damage in fault conditions

The information provided herein is believed to be reliable at press time. Maestro Wireless Solutions assumes no responsibility for inaccuracies or omission. Maestro Wireless Solutions assumes no responsibility for the use of this information, and all such information shall be entirely at the users own risk. Prices and specifications are subject to change without notice. Maestro Wireless Solutions does not authorize or warrant any of its products for use in life support devices and/or systems. Images are for reference only.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Maestro Wireless:](#)

[A2035-H](#) [A2035-H-V412](#)