

# 面板安装型转接器/线

## Panel Mounting Type Connector

# 2020 目录 ①

## Contents

|   |  |   |  |   |  |  |
|---|--|---|--|---|--|--|
| <p>塑料USB面板接口<br/>(经济型)<br/>Plastic USB Panel Jack<br/>(Economy type)</p>  | <br>型号/Model: USB-01C<br>P1     | <br>型号/Model: USB-01C-BK<br>P1             | <br>型号/Model: USB-02C<br>P1                  | <br>型号/Model: USB-02C-BK<br>P1 | <br>型号/Model: USB-03C<br>P1     |  |
|   | <br>型号/Model: USB-03C-BK<br>P1   | <br>型号/Model: USB-04C<br>P1                | <br>型号/Model: USB-04C-BK<br>P1                | <br>型号/Model: USB-08C<br>P2     | <br>型号/Model: USB-08C-BK<br>P2  | <br>型号/Model: USB-09C<br>P2     |
|   | <br>型号/Model: USB-09C-BK<br>P2  | <br>型号/Model: USB-10C<br>P2               | <br>型号/Model: USB-10C-BK<br>P2               | <br>型号/Model: USB-05C<br>P3    | <br>型号/Model: USB-05C-BK<br>P3 | <br>型号/Model: USB-19C<br>P3    |
|   | <br>型号/Model: USB-19C-BK<br>P3 | <b>NEW</b><br><br>型号/Model: USB-23<br>P3 |  |   |  |  |
|   | <p>金属USB面板插口<br/>(Metal USB Panel Jack)</p>  | <br>型号/Model: USB-01<br>P4               | <br>型号/Model: USB-01-BK<br>P4               | <br>型号/Model: USB-02<br>P4    | <br>型号/Model: USB-02-BK<br>P4 | <br>型号/Model: USB-03<br>P4    |
|   |  | <br>型号/Model: USB-03-BK<br>P4             | <br>型号/Model: USB-04<br>P4                  | <br>型号/Model: USB-04-BK<br>P4  | <br>型号/Model: USB-06<br>P5     | <br>型号/Model: USB-06-BK<br>P5 |
| <br>型号/Model: USB-07-BK<br>P5 |  | <b>NEW</b><br><br>型号/Model: USB-19<br>P5 | <b>NEW</b><br><br>型号/Model: USB-19-BK<br>P5 | <br>型号/Model: USB-08<br>P6    | <br>型号/Model: USB-08-BK<br>P6 | <br>型号/Model: USB-09<br>P6    |
|   |  |   |  |   |  |  |
|   |  |   |  |   |  |  |
|   |  |   |  |   |  |  |

# 面板安装型转接器/线 Panel Mounting Type Connector

# 2020 目录 ② Contents

|  |  |   |   |   |   |   |
|--|--|---|---|---|---|---|
| <br>型号/Model: USB-09-BK<br>P6          | <br>型号/Model: USB-10<br>P6          | <br>型号/Model: USB-10-BK<br>P6          | <br>型号/Model: USB-12<br>P7          | <br>型号/Model: USB-12-BK<br>P7          | <br>型号/Model: USB-13<br>P7         |   |
| <br>型号/Model: USB-13-BK<br>P7          | <br>型号/Model: USB-14<br>P7          | <br>型号/Model: USB-14-BK<br>P7          | <br>型号/Model: USB-17<br>P8          | <br>型号/Model: USB-17-BK<br>P8          | <br>型号/Model: USB-18<br>P8         |   |
| <br>型号/Model: USB-18-BK<br>P8         | <br>型号/Model: Mini USB-01<br>P9    | <br>型号/Model: Mini USB-01-BK<br>P9    | <br>型号/Model: Mini USB-04<br>P9    | <br>型号/Model: Mini USB-04-BK<br>P9    | <br>型号/Model: Micro USB-01<br>P10 |   |
| <br>型号/Model: Micro USB-01-BK<br>P10 | <br>型号/Model: Micro USB-02<br>P10 | <br>型号/Model: Micro USB-02-BK<br>P10 | <br>型号/Model: Micro USB-03<br>P10 | <br>型号/Model: Micro USB-03-BK<br>P10 |   |   |
| 其它面板插口<br>(Other Panel Jack)   | <br>型号/Model: STEREO-02<br>P11    | <br>型号/Model: STEREO-02-BK<br>P11    | <br>型号/Model: RJ45-01<br>P11      | <br>型号/Model: RJ45-01-BK<br>P11      | <br>型号/Model: RJ45-02<br>P11     |   |
|  | <br>型号/Model: RJ45-02-BK<br>P11    | <br>型号/Model: HDMI-01<br>P12         | <br>型号/Model: HDMI-01-BK<br>P12    | <br>型号/Model: HDMI-02<br>P12          | <br>型号/Model: HDMI-02-BK<br>P12  | <br>型号/Model: HDMI-03<br>P12 |
|  | <br>型号/Model: HDMI-03-BK<br>P12    | <br>型号/Model: Protective 01<br>P12   | <br>型号/Model: Protective 02<br>P12 | <br>型号/Model: Protective 03<br>P12    |   |   |

# 面板安装型 USB2.0 转接器 / 线


Panel mounting type  
USB2.0 connector

- 工程塑料壳体，有黑色和银白两色可选，其他颜色可定制。  
Engineering plastic shell, have black and silver for your choose, other color can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度: -25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C(NO Freezing)
- 面板开孔尺寸: Φ22mm  
Panel Cutout: Φ22mm
- 面板厚度: 1~10mm  
Panel Thickness: 1~10mm
- 传输速率: ≥30MB/s  
Transmission Rate: ≥30MB/s
- 操作环境湿度: 45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)

型号/Model : USB-01C

型号/Model : USB-01C-BK


产品描述 : USB2.0 头部A型母/尾部A型母  
Product Description: USB2.0 HEAD FEMALE A/BACK FEMALE A

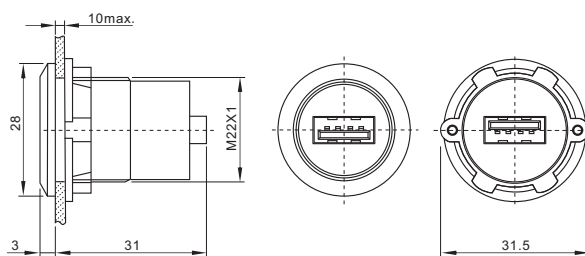

型号/Model : USB-02C

型号/Model : USB-02C-BK


产品描述 : USB2.0 头部A型母/尾部B型母  
Product Description: USB2.0 HEAD FEMALE A/BACK FEMALE B

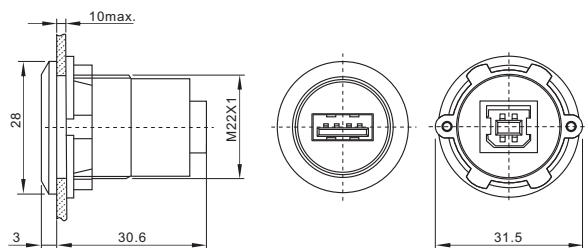

型号/Model : USB-03C

型号/Model : USB-03C-BK


产品描述 : USB2.0 头部B型母/尾部A型母  
Product Description: USB2.0 HEAD FEMALE B/BACK FEMALE A

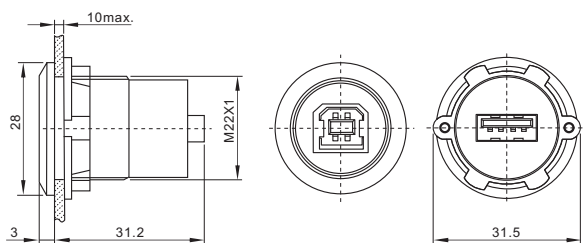

型号/Model : USB-04C

型号/Model : USB-04C-BK

产品描述 : USB2.0 头部B型母/尾部B型母  
Product Description: USB2.0 HEAD FEMALE B/BACK FEMALE B

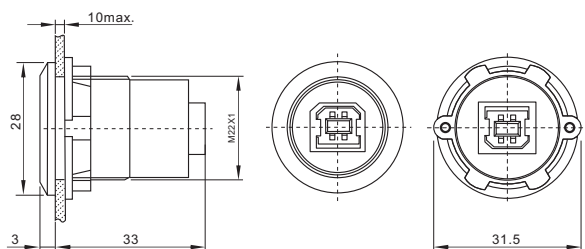

# 面板安装型 USB3.0转接器 / 线


Panel mounting type  
USB3.0 connector

- 工程塑料壳体，有黑色和银白两色可选，其他颜色可定制。  
Engineering plastic shell, have black and silver for your choose, other color can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度: -25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C(NO Freezing)
- 面板开孔尺寸: Φ22mm  
Panel Cutout: Φ22mm
- 面板厚度: 1~10mm  
Panel Thickness: 1~10mm
- 传输速率: ≥100MB/s  
Transmission Rate: ≥100MB/s
- 操作环境湿度: 45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)

型号/Model : USB-08C

型号/Model : USB-08C-BK


产品描述 : USB3.0 头部A型母/尾部A型母  
Product Description: USB3.0 HEAD FEMALE A/BACK FEMALE A

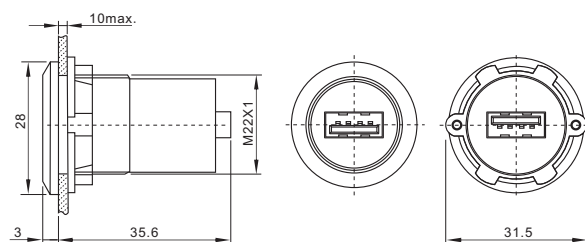

型号/Model : USB-09C

型号/Model : USB-09C-BK


产品描述 : USB3.0 头部A型母/尾部B型母  
Product Description: USB3.0 HEAD FEMALE A/BACK FEMALE B

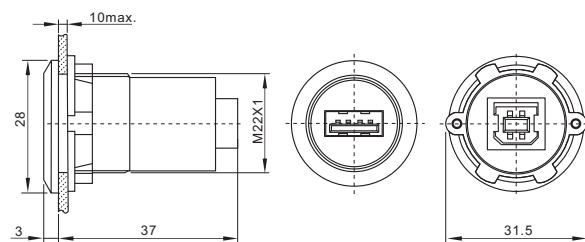

型号/Model : USB-10C

型号/Model : USB-10C-BK

产品描述 : USB3.0 头部B型母/尾部A型母  
Product Description: USB3.0 HEAD FEMALE B/BACK FEMALE A

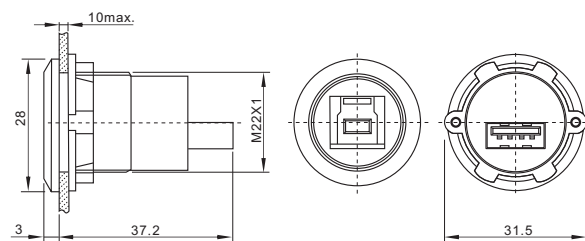

# 面板安装型 USB2.0 转接器 / 线

Panel mounting type  
USB2.0 connector

- 工程塑料壳体，有黑色和银白两色可选，其他颜色可定制。  
Engineering plastic shell, have black and silver for your choose, other color can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度: -25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C(NO Freezing)
- 面板开孔尺寸: Φ22mm  
Panel Cutout: Φ22mm
- 面板厚度: 1~10mm  
Panel Thickness: 1~10mm
- 传输速率: ≥30MB/s  
Transmission Rate: ≥30MB/s
- 操作环境湿度: 45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)


型号/Model : USB-05C

型号/Model : USB-05C-BK



产品描述：带灯USB2.0 头部A型母/尾部A型公  
Product Description: Illuminated USB2.0 HEAD FEMALE A/BACK MALE A

线长：约60cm  
Wire Length : About 60cm

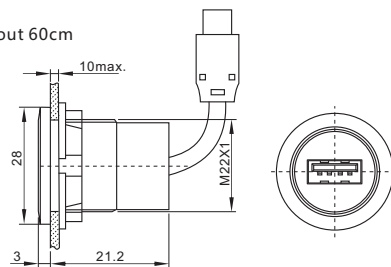


型号/Model : USB-19C

型号/Model : USB-19C-BK



产品描述：USB2.0 头部A型母/尾部A型公  
Product Description: USB2.0 FEMALE A/MALE A

线长：约60cm  
Wire Length : About 60cm

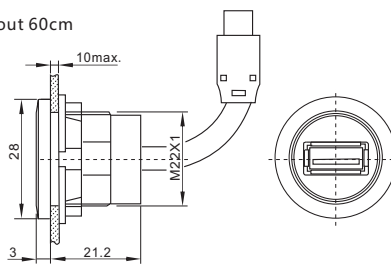


型号/Model : USB-23-BK



产品描述：USB2.0 头部A型母/尾部A型公  
Product Description: USB2.0 FEMALE A/MALE A

线长：约60cm  
Wire Length : About 60cm

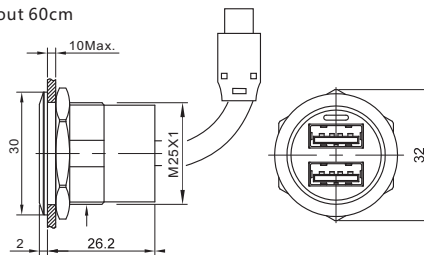

# 面板安装型 USB2.0 转接器 / 线


Panel Mounting type  
USB2.0 Connector

- 金属外壳采用铝合金材质，有黑色和银白两色可选，其他颜色可定制。  
Metal crust made of Aluminium Alloy, have black and silver for your choose, other color can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度: -25°C~ +55°C(无冰冻)  
Operating Temperature: -25°C~ +55°C(NO Freezing)
- 面板开孔尺寸: Φ22mm  
Panel Cutout: Φ22mm
- 面板厚度:1~10mm  
Panel Thickness:1~10mm
- 传输速率:≥30MB/s  
Transmission Rate:≥30MB/s
- 操作环境湿度:45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)

型号/Model : USB-01

型号/Model : USB-01-BK


产品描述 : USB2.0 头部A型母/尾部A型母  
Product Description: USB2.0 HEAD FEMALE A/BACK FEMALE A

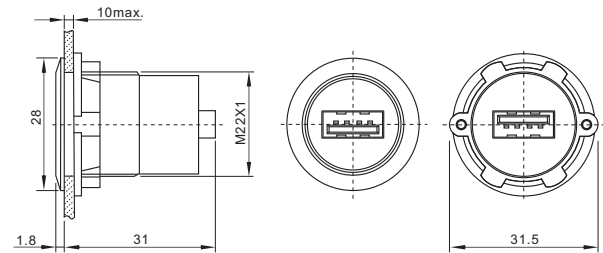

型号/Model : USB-02

型号/Model : USB-02-BK


产品描述 : USB2.0 头部A型母/尾部B型母  
Product Description: USB2.0 HEAD FEMALE A/BACK FEMALE B

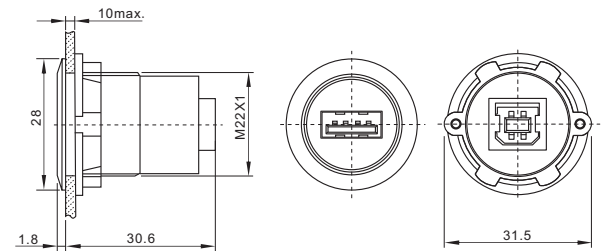

型号/Model : USB-03

型号/Model : USB-03-BK


产品描述 : USB2.0 头部B型母/尾部A型母  
Product Description: USB2.0 HEAD FEMALE B/BACK FEMALE A

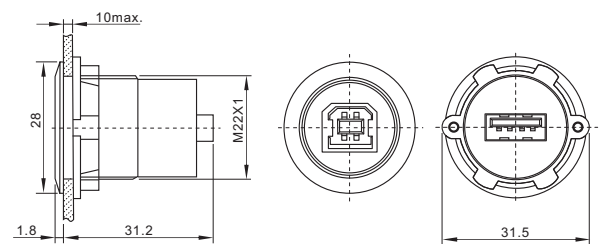

型号/Model : USB-04

型号/Model : USB-04-BK

产品描述 : USB2.0 头部B型母/尾部B型母  
Product Description: USB2.0 HEAD FEMALE B/BACK FEMALE B

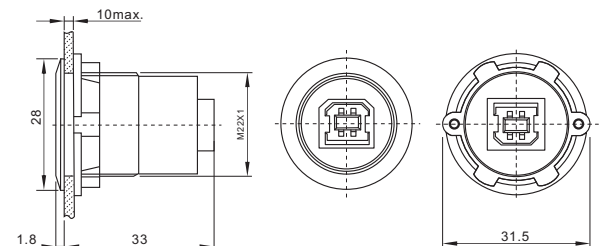

# 面板安装型 USB2.0 转接器 / 线

Panel mounting type  
USB2.0 connector


- 金属外壳采用铝合金材质，有黑色和银白两色可选，其他颜色可定制。  
Metal crust made of Aluminium Alloy, have black and silver for your choose, other color can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度: -25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C(NO Freezing)
- 面板开孔尺寸: Φ22mm  
Pane Cutout: Φ22mm
- 面板厚度:1~10mm  
Panel Thickness:1~10mm
- 传输速率:≥30MB/s  
Transmission Rate:≥30MB/s
- 操作环境湿度:45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)

型号/Model : USB-06

型号/Model : USB-06-BK



产品描述：双层USB2.0 头部A型母/尾部A型公  
Product Description: Double USB2.0 HEAD FEMALE A/BACK MALE A  
线长：约60cm  
Wire Length : About 60cm

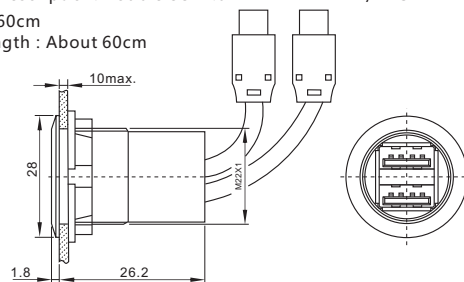


型号/Model : USB-07

型号/Model : USB-07-BK



产品描述：双层USB2.0 头部A型母/尾部A型母  
Product Description: Double USB2.0 HEAD FEMALE A/BACK FEMALE A

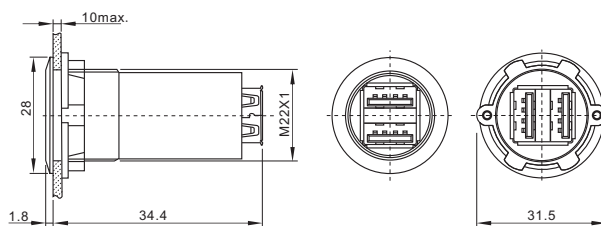


型号/Model : USB-19

型号/Model : USB-19-BK



产品描述：USB2.0 头部A型母/尾部A型公  
Product Description: USB2.0 FEMALE A/MALE A  
线长：约60cm  
Wire Length : About 60cm

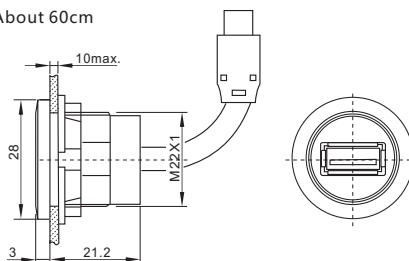

# 面板安装型 USB3.0 转接器 / 线

Panel mounting type  
USB3.0 connector

- 金属外壳采用铝合金材质，有黑色和银白两色可选，其他颜色可定制。  
Metal crust made of Aluminium Alloy, have black and silver for your choose, other color can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度: -25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C(NO Freezing)
- 面板开孔尺寸: Φ22mm  
Panel Cutout: Φ22mm
- 面板厚度: 1~10mm  
Panel Thickness: 1~10mm
- 传输速率: ≥100MB/s  
Transmission Rate: ≥100MB/s
- 操作环境湿度: 45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)


型号/Model : USB-08



型号/Model : USB-08-BK



产品描述 : USB3.0 头部A型母/尾部A型母  
Product Description: USB3.0 HEAD FEMALE A/BACK FEMALE A

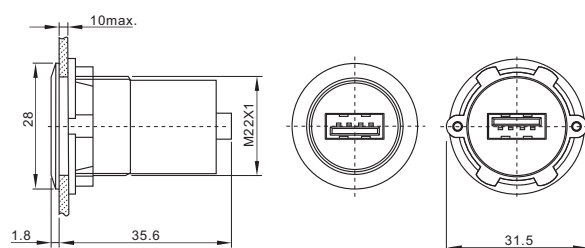


型号/Model : USB-09



型号/Model : USB-09-BK



产品描述 : USB3.0 头部A型母/尾部B型母  
Product Description: USB3.0 HEAD FEMALE A/BACK FEMALE B

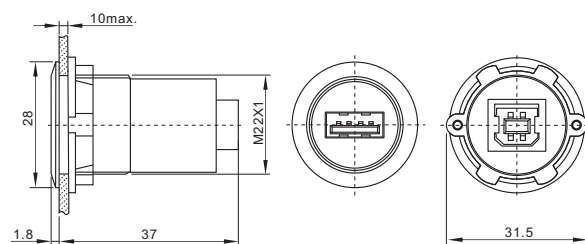


型号/Model : USB-10



型号/Model : USB-10-BK



产品描述 : USB3.0 头部B型母/尾部A型母  
Product Description: USB3.0 HEAD FEMALE B/BACK FEMALE A

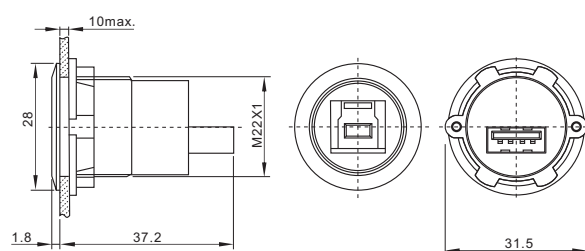



# 面板安装型 USB3.0转接器 / 线

Panel mounting type  
USB3.0 connector

- 金属外壳采用铝合金材质，有黑色和银白两色可选，其他颜色可定制。  
Metal crust made of Aluminium Alloy, have black and silver for your choose, other color can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度: -25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C(NO Freezing)
- 面板开孔尺寸: Φ22,25mm  
Pane Cutout: Φ22,25mm
- 面板厚度:1~10mm  
Panel Thickness:1~10mm
- 传输速率:≥100MB/s  
Transmission Rate:≥100MB/s
- 操作环境湿度:45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)

型号/Model : USB-12




型号/Model : USB-12-BK



产品描述 : USB3.0 头部A型母/尾部A型公  
Product Description: USB3.0 HEAD FEMALE A/BACK MALE A

线长 : 约60cm  
Wire Length : About 60cm

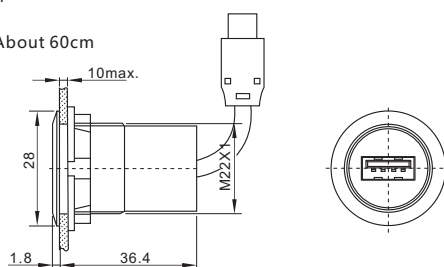

型号/Model : USB-13




型号/Model : USB-13-BK



产品描述 : 双层USB3.0 头部A型母/尾部A型公  
Product Description: Double USB3.0 HEAD FEMALE A/BACK MALE A

线长 : 约60cm  
Wire Length : About 60cm

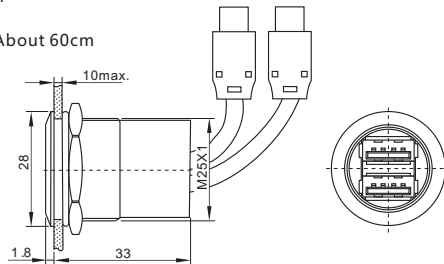


型号/Model : USB-14



型号/Model : USB-14-BK



产品描述 : 双层USB3.0 头部A型母/尾部A型母  
Product Description: Double USB3.0 HEAD FEMALE A/BACK FEMALE A

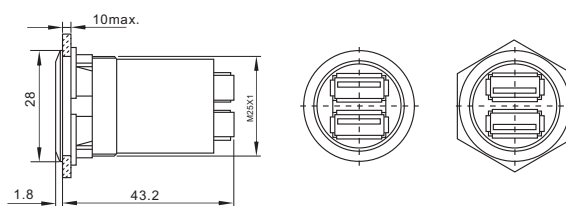

# 面板安装型 USB3.1转USB-C转接器

Panel Mounting type  
USB3.1 to USB-C Connector

- 金属外壳采用铝合金材质，有黑色和银白两色可选，其他颜色可定制。  
Metal crust made of Aluminium Alloy, have black and silver for your choose, other color can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度: -25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C(NO Freezing)
- 面板开孔尺寸: Φ22,25mm  
Panel Cutout: Φ22,25mm
- 面板厚度:1~10mm  
Panel Thickness:1~10mm
- 传输速率:≥100MB/s  
Transmission Rate:≥100MB/s
- 操作环境湿度:45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)


型号/Model : USB-17



型号/Model : USB-17-BK



产品描述：带灯USB3.1 头部A型母/尾部C型公  
Product Description: Illuminated USB3.1 HEAD FEMALE A/BACK MALE C  
线长：约60cm  
Wire Length : About 60cm

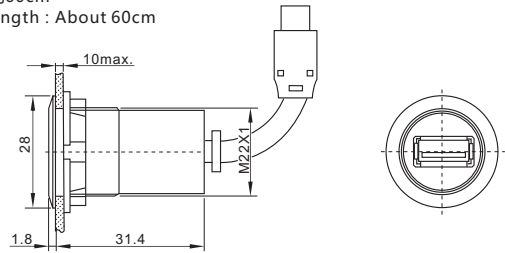


型号/Model : USB-18



型号/Model : USB-18-BK



产品描述：USB3.1 头部A型母/尾部C型公  
Product Description: USB3.1 HEAD FEMALE A/BACK MALE C

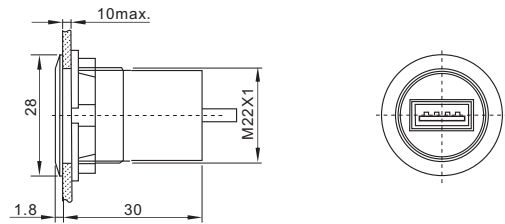

# 面板安装型 USB3.1转接器 / 线


Panel mounting type  
USB 3.1 connector

- 金属外壳采用铝合金材质，有黑色和银白两色可选，其他颜色可定制。  
Black and silver color aluminium alloy housing, other colors can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度：-25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C (NO Freezing)
- 面板开孔尺寸：Φ22,25mm  
Panel Cutout: Φ22,25mm
- 面板厚度：1~10mm  
Panel Thickness: 1~10mm
- 功能：5A 快速充电，10GBps 速率  
Function: 5A fast charging, 10GBps rate
- 应用：充电+数据传输+视频同步传输+延长数据线  
Application: MP3 / MP4 player, Video game player, Camera and Mobile phone

型号/Model : USBC-01

型号/Model : USBC-01-BK


产品描述 : USB3.1 母C/USB3.1 母C  
Product Description: USB3.1 FEMALE C/ FEMALE C

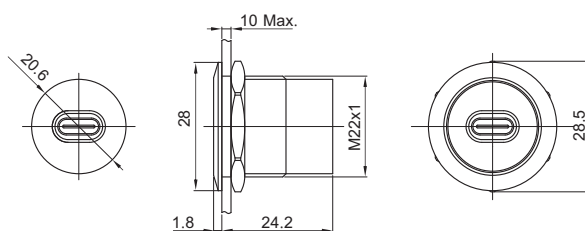

型号/Model : USBC-02

型号/Model : USBC-02-BK


产品描述 : USB3.1 母C/USB3.1 公C  
Product Description: USB3.1 FEMALE C/ MALE C

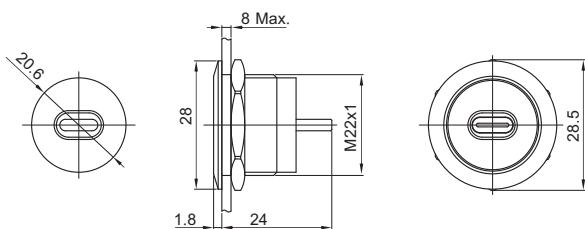

型号/Model : USBC-03

型号/Model : USBC-03-BK


产品描述 : USB3.1 母C/USB3.0 母A  
Product Description: USB3.1 FEMALE C/ USB3.0 FEMALE A

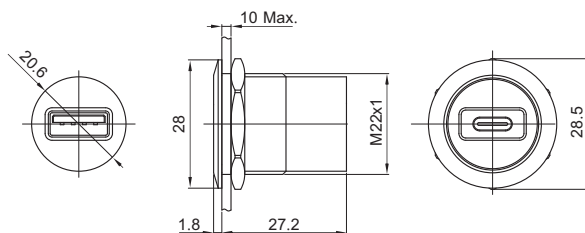

型号/Model : USBC-04

型号/Model : USBC-04-BK

产品描述 : USB3.1 母C/USB3.1 公C 100cm cable  
Product Description: USB3.1 FEMALE C/ MALE C 100cm cable

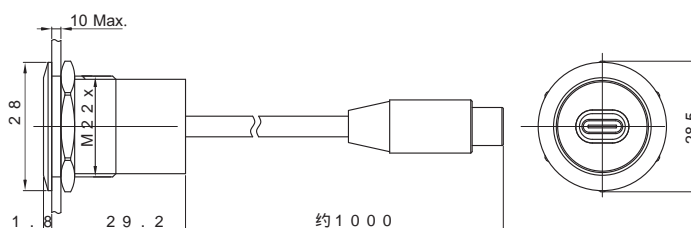

# 面板安装型 迷你USB2.0 转接器 / 线

Panel Mounting type  
Mini USB2.0 Connector

- 金属外壳采用铝合金材质，有黑色和银白两色可选，其他颜色可定制。  
Black and silver color aluminium alloy housing, other colors can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度：-25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C (NO Freezing)
- 面板开孔尺寸：Φ22mm  
Panel Cutout: Φ22mm
- 面板厚度：1~10mm  
Panel Thickness: 1~10mm
- 传输速率：≥30MB/s  
Transmission Rate: ≥30MB/s
- 操作环境湿度：45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)


型号/Model : Mini USB-01



型号/Model : Mini USB-01-BK



产品描述：Mini USB2.0 头部B型母/尾部B型公  
Product Description: Mini USB2.0 FEMALE B/ MALE B

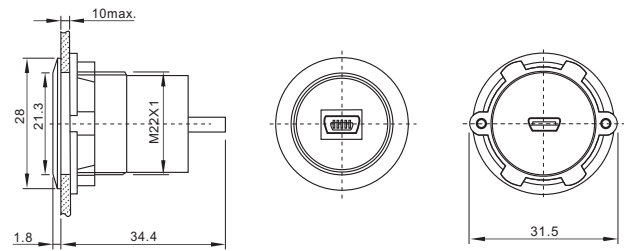


型号/Model : Mini USB-04



型号/Model : Mini USB-04-BK



产品描述：Mini USB2.0 头部2×B型母/尾部B型公  
Product Description: Mini USB2.0 2×FEMALE B/ MALE B

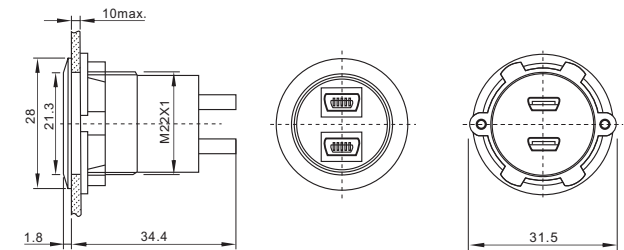

# 面板安装型 微型USB2.0转接器 / 线

Panel Mounting type  
Micro USB2.0 Connector

- 金属外壳采用铝合金材质，有黑色和银白两色可选，其他颜色可定制。  
Metal crust made of Aluminium Alloy, have black and silver for your choose, other color can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度: -25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C(NO Freezing)
- 面板开孔尺寸: Φ22mm  
Panel Cutout: Φ22mm
- 面板厚度:1~10mm  
Panel Thickness:1~10mm
- 传输速率:≥30MB/s  
Transmission Rate:≥30MB/s
- 操作环境湿度:45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)


型号/Model : Micro USB-01



型号/Model : Micro USB-01-BK



产品描述 : Micro USB2.0 头部B型母/尾部B型公  
Product Description: Micro USB2.0 FEMALE B/ MALE B

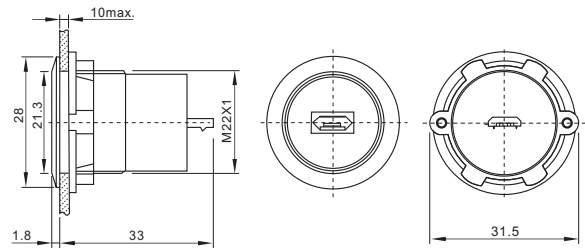


型号/Model : Micro USB-02



型号/Model : Micro USB-02-BK



产品描述 : Micro USB2.0 头部2×B型母/尾部B型公  
Product Description: Micro USB2.0 2×FEMALE B/ MALE B  
线长 : 约60cm  
Wire Length : About 60cm

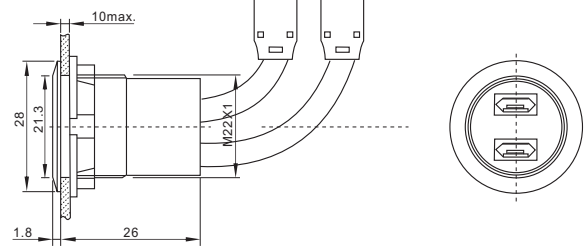


型号/Model : Micro USB-03



型号/Model : Micro USB-03-BK



产品描述 : Micro USB2.0 头部2×B型母/尾部B型公  
Product Description: Micro USB2.0 2×FEMALE B/ MALE B

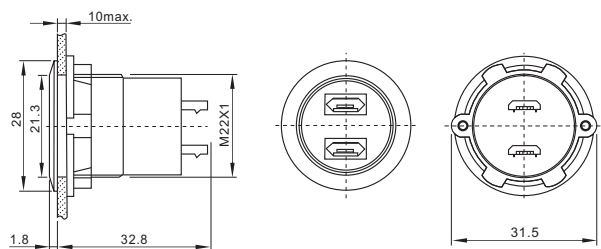

# 面板安装型 其它转接器 / 线

Panel mounting type  
USB2.0 connector

- 金属外壳采用铝合金材质，有黑色和银白两色可选，其他颜色可定制。  
Metal crust made of Aluminium Alloy, have black and silver for your choose, other color can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度: -25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C(NO Freezing)
- 面板开孔尺寸: Φ22mm  
Pane Cutout: Φ22mm
- 面板厚度: 1~10mm  
Panel Thickness: 1~10mm
- 操作环境湿度: 45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)


型号/Model : STEREO-02



型号/Model : STEREO-02-BK



产品描述 : 头部STEREO母/尾部STEREO公  
Product Description: STEREO FEMALE/STEREO MALE  
线长 : 约60cm  
Wire Length : About 60cm

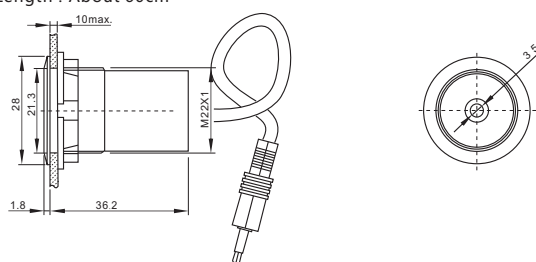


型号/Model : RJ45-01



型号/Model : RJ45-01-BK



产品描述 : 头部RJ45母/尾部RJ45公  
Product Description: RJ45 FEMALE/RJ45 MALE  
线长 : 约60cm  
Wire Length : About 60cm

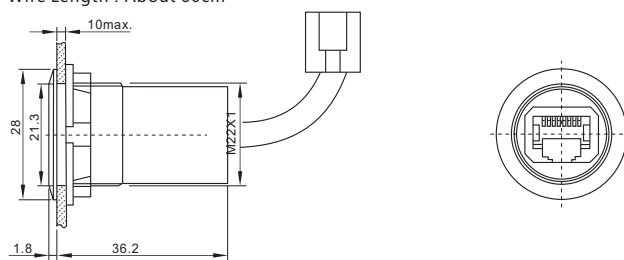


型号/Model : RJ45-02



型号/Model : RJ45-02-BK



产品描述 : 头部RJ45母/尾部RJ45母  
Product Description: RJ45 FEMALE/RJ45 FEMALE

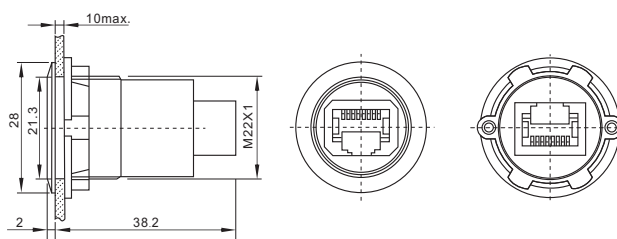

# 面板安装型 其它转接器 / 线

Panel mounting type  
USB2.0 connector

- 金属外壳采用铝合金材质，有黑色和银白两色可选，其他颜色可定制。  
Metal crust made of Aluminium Alloy, have black and silver for your choose, other color can be customized.
- 使用螺母固定，安装简便。  
Fixed by nut, easy to install.
- 操作环境温度: -25°C~+55°C(无冰冻)  
Operating Temperature: -25°C~+55°C(NO Freezing)
- 面板开孔尺寸: Φ22mm  
Pane Cutout: Φ22mm
- 面板厚度: 1~10mm  
Panel Thickness: 1~10mm
- 操作环境湿度: 45~85%RH(无结露)  
Operating Humidity: 45~85%RH(NO Condensation)


型号/Model : HDMI-01



型号/Model : HDMI-01-BK



产品描述 : 头部HDMI母/尾部HDMI公  
Product Description: HDMI FEMALE/HDMI MALE

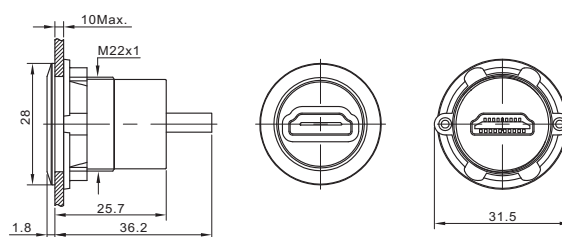


型号/Model : HDMI-02



型号/Model : HDMI-02-BK



产品描述 : 头部HDMI母/尾部HDMI母  
Product Description: HDMI FEMALE/HDMI FEMALE

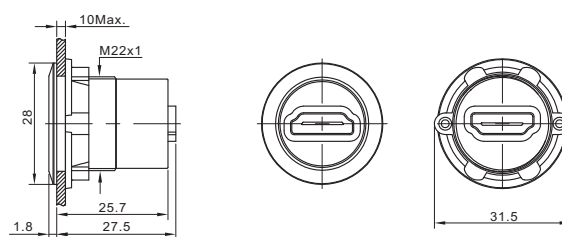


型号/Model : HDMI-03



型号/Model : HDMI-03-BK



产品描述 : 头部HDMI母/尾部HDMI公  
Product Description: HDMI FEMALE/HDMI MALE  
线长 : 约60cm  
Wire Length : About 60cm

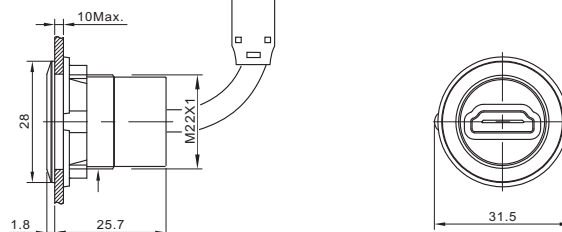

# 附件

Accessory



型号/Model : Protective 01




型号/Model : Protective 02



保护罩01用于USB-05 与 USB-05-BK  
Protective 01 only for USB-05 and USB-05-BK Version  
保护罩02用于USB-05 与 USB-05-BK以外的Φ22mm产品  
Protective 02 for Φ22mm diameter products except USB-05 and USB-05-BK

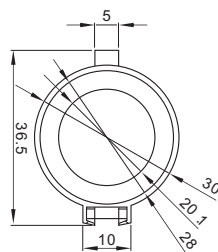

保护罩01 Protective 01



保护罩02 Protective 02

型号/Model : Protective 03



保护罩03用于所有Φ22mm产品  
用于密封,可使产品达到IP65  
Protective 03 for all Φ22mm diameter products  
For sealing, the product can reach IP65.

